



CIRCULAR SILENCER  
TYPE CAK

## CAK

### FOR THE REDUCTION OF NOISE IN PLASTIC CIRCULAR DUCTS FOR CONTAMINATED AIR

Plastic circular silencers for the reduction of noise in the circular ducts of extract air systems for aggressive media

- Absorption material is non-combustible mineral wool with RAL quality mark, biosoluble and hence hygienically safe according to the German TRGS 905 (Technical Rules for Hazardous Substances) and EU directive 97/69/EC
- Mineral wool faced with non-woven glass fibre as protection against erosion due to airflow velocities up to 20 m/s
- Casing and perforated inner duct are flame-resistant polypropylene (PPs) to DIN 4102, building class B1
- Variant with spigot suitable for circular ducts according to DIN 8077 or DIN 8078
- Insertion loss measured according to ISO 7235
- Casing air leakage to EN 15727, class D

Optional equipment and accessories

- With flanges on both ends

## General information

---



### Application

- Plastic circular silencers Type CAK for the reduction of noise in the circular ducts of air conditioning systems
- Suitable for contaminated air
- For the reduction of air-regenerated noise of air terminal units TVRK and TVLK
- For the reduction of fan noise

### Special features

- Insertion loss measured according to ISO 7235
- Absorption material is non-combustible

### Nominal sizes

- 125, 160, 200, 250, 315, 400 mm

### Variants

- CAK: Circular silencer
- VF2: Circular silencer with flanges on both ends

### Parts and characteristics

- Casing
- Perforated inner tube
- Absorption material

### Accessories

- Matching flanges for both ends, including seals

### Construction features

- Circular casing
- Spigot suitable for circular ducts according to DIN 8077 or DIN 8078
- Maximum operating pressure 1000 Pa
- Max. operating temperature 100 °C

### Materials and surfaces

- Casing and perforated inner duct are flame-resistant polypropylene (PPs) to DIN 4102, building class B1
- Lining is mineral wool

#### Mineral wool

- To EN 13501, fire rating class A2, non-combustible
- RAL quality mark RAL-GZ 388
- Biosoluble and hence hygienically safe according to the German TRGS 905 (Technical Rules for Hazardous Substances) and EU directive 97/69/EC
- Faced with glass fibre as protection against erosion through airflow velocities up to 20 m/s
- Inert to fungal and bacterial growth

### Standards and guidelines

- Insertion loss measured according to ISO 7235
- Casing air leakage to EN 15727, class D

### Maintenance

- Maintenance-free as construction and materials are not subject to wear

## TECHNICAL INFORMATION

Technical data, Quick sizing, Specification text, Order code



<b>Nominal sizes</b>	125 - 400 mm
<b>Operating pressure</b>	1000 Pa
<b>Operating temperature</b>	100 °C max.

The stated differential pressures for circular silencers correspond to the values for smooth pipes. Deviations, if any, are of no practical relevance.  
 For ductwork calculation, if the length of a circular silencer is included in the total length of the ductwork, no extra length must be added.

**CAK, insertion loss**

Nominal size	Nominal length	Centre frequency $f_m$ [Hz]							
		63	125	250	500	1000	2000	4000	8000
Nominal size	Nominal length	$D_e$							
	mm	Hz							
125	500	1	6	7	14	25	23	14	12
	1000	2	9	13	22	34	35	24	16
125	1500	3	12	19	31	42	43	33	20
160	500	0	3	5	11	22	21	12	10
	1000	1	4	9	18	30	31	19	13
160	1500	2	7	13	25	38	41	27	17
200	500	0	2	4	10	21	17	10	8
	1000	1	4	9	15	29	25	16	11
200	1500	1	6	12	21	36	33	20	14
250	500	0	2	4	9	19	13	9	8
	1000	0	4	8	14	26	22	15	11
250	1500	1	6	11	20	35	30	20	15
315	500	0	2	3	8	18	12	7	6
	1000	0	4	6	14	26	17	11	8
315	1500	1	6	9	19	34	23	15	10
400	500	0	2	3	6	14	8	6	4
	1000	0	3	6	11	25	13	10	7
400	1500	1	4	8	16	29	15	11	8

**CAK, differential pressure**

Nominal size	V		Nennlänge [mm]		
			500	1000	1500
Nominal size	V		Δp <sub>st</sub>		
	l/s	m <sup>3</sup> /h	Pa		
125	50	180	2	2	4
	95	342	4	6	10
125	120	432	6	10	14
	145	522	6	14	20
160	80	288	2	2	2
	155	558	2	6	8
160	195	702	4	8	10
	235	846	6	10	14
200	125	450	2	2	2
	245	882	2	4	6
200	310	1116	4	6	8
	370	1332	4	8	10
250	195	702	<2	<2	<2
	385	1386	<2	4	4
250	485	1746	2	4	6
	580	2088	4	6	8
315	310	1116	<2	<2	<2
	615	2214	<2	2	4
315	770	2772	<2	4	4
	925	3330	2	4	6
400	500	1800	<2	<2	<2
	995	3582	<2	<2	2
400	1245	4482	<2	2	4
	1495	5382	<2	4	4

Plastic circular silencers for use in extract air systems subject to aggressive media; they reduce the air-regenerated noise in plastic ducts (absorption principle).

Insertion loss measured according to ISO 7235.

Absorption material is mineral wool with RAL quality mark RAL-GZ 388.

Spigot, suitable for ducts according to DIN 8077.

Casing air leakage to EN 15727, class D.

#### Special features

- Insertion loss measured according to ISO 7235
- Absorption material is non-combustible

#### Materials and surfaces

- Casing and perforated inner duct are flame-resistant polypropylene (PPs) to DIN 4102, building class B1
- Lining is mineral wool

Mineral wool

- To EN 13501, fire rating class A2, non-combustible
- RAL quality mark RAL-GZ 388
- Biosoluble and hence hygienically safe according to the German TRGS 905 (Technical Rules for Hazardous Substances) and EU directive 97/69/EC
- Faced with glass fibre as protection against erosion through airflow velocities up to 20 m/s
- Inert to fungal and bacterial growth

#### Technical data

- Nominal sizes: 125 to 400 mm
- Operating pressure: 1000 Pa max.
- Operating temperature: 100 °C max.

#### Sizing data

- D \_\_\_\_\_ [mm]
- H \_\_\_\_\_ [mm]
- Insulation thickness \_\_\_\_\_ [mm]
- V \_\_\_\_\_ [m<sup>3</sup>/h]
- D<sub>e</sub> at 250 Hz \_\_\_\_\_ [dB]
- Δp<sub>st</sub> \_\_\_\_\_ [Pa]

Order example: **CAK/200×1000**

Nominal size	200 mm
Length	1000 mm
Type of connection	Spigot

## CAK / 160×1000 / GZ / VF2



### 1 Type

CAK Circular silencer

### 3 Length [mm]

500  
1000  
1500

### 2 Nominal size [mm]

125  
160  
200  
250  
315  
400

### 4 Matching flange

No entry: none  
GZ on both ends (only VF2)

### 5 Type of connection

No entry: spigot  
VF2 Flanges on both ends

## Variants, Dimensions and weight



### CAK

#### Variant


- Circular silencer for the reduction of noise
- Spigot

### CAK/.../VF2

#### Variant

- Circular silencer for the reduction of noise
- With flanges to make detachable connections to the ductwork

CAK

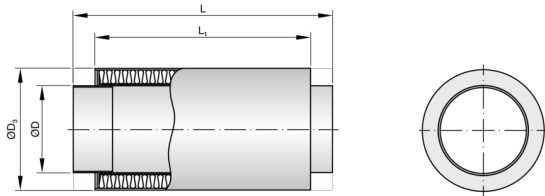

Installation details, Basic information and nomenclature



#### Installation and commissioning

- Any installation orientation
- Installation in ducts outside of closed rooms requires sufficient protection against the effects of weather

## Principal dimensions

### **ØD [mm]**

Outer diameter of the spigot

### **ØD<sub>3</sub> [mm]**

Outer diameter of circular silencers

### **L [mm]**

Length of attenuator/silencer including spigot (in airflow direction)

### **L<sub>1</sub> [mm]**

Length of acoustic cladding and acoustically effective length

### **B [mm]**

Attenuator width and duct width (upright splitters)

### **H [mm]**

Attenuator height and duct height (upright splitters)

### **T [mm]**

Splitter thickness

### **S [mm]**

Airway width

### **n [ ]**

Number of flange screw holes

### **m [kg]**

Weight

## Nomenclature

### **f<sub>m</sub> [Hz]**

Octave band centre frequency

### **L<sub>WA</sub> [dB(A)]**

A-weighted sound power level of air-regenerated noise

### **D<sub>e</sub> [dB]**

Insertion loss

### **V [m<sup>3</sup>/h] and [l/s]**

Volume flow rate

### **Δp<sub>st</sub> [Pa]**

Static differential pressure

All sound power levels are based on 1 pW.

All values were measured in a TROX lab and to EN ISO 7235. Intermediate values may be achieved by interpolation.

Lab measurements exceeding 50 dB are indicated as 50 dB, in line with common practice.